instructions fastening by montage. montage montage with PATTEX P300 Fixation Extême or 3M réf: 847. Caution: if the installation may suffer a high

3M réf. 847. Caution: if the installation may suffer a high temperature gap, it is advised to leave some space (2 to 5 mm) between all plates to allow

plates dilatation.


composition

basis made of polypropylene (EPDM rubber) and botons made of polyethylene.

fire resistance:

french classification: M3

euroclasse classification (legal disposition november 21/2002): DS1

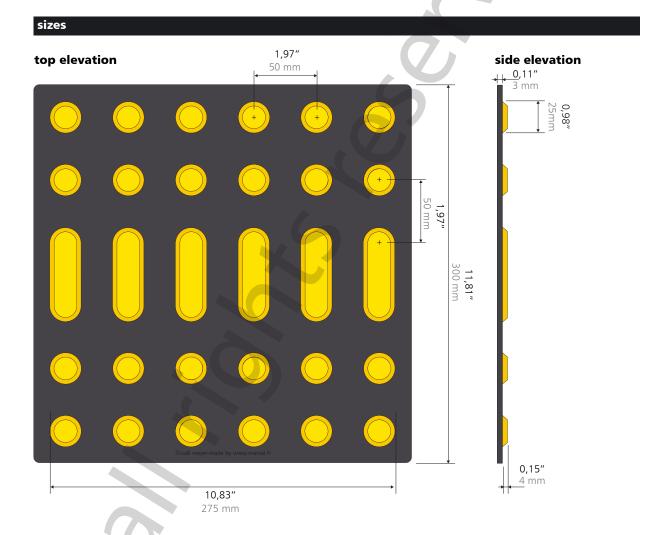

polypropylene

finish

standard

black (+/- RAL 7016 / yellow (+/- RAL 1018)